

**SOKKIA**

***PIE***

# **iM-50 Series**

**intelligence Measurement Station**

## **High Quality, High Return!**

- **Construction and Survey Application Software**
- **Fast & Accurate & Powerful Measuring Distance Feature**
- **500m Long Range Reflectoress Measurement**
- **Rugged & Waterproof Design**
- **Reliable Large Volume Internal Memory**



**Made in Japan**


# iM-50 Series

intelligence Measurement Station

## SPECIFICATIONS

### Fast and Powerful Reflectorless EDM

- Fast and accurate pinpointing with phase shift technology.
- Fast distance measurement of 0.9s regardless of object.
- Minimum reflectorless measuring distance - just 30cm.
- Improved collimation with super-bright pointer.
- Smaller EDM beam spot size for minimal distance measuring error.
- Dependable measuring even at shallow incidence angles.
- Ensures accurate reflective sheet distance measurement.

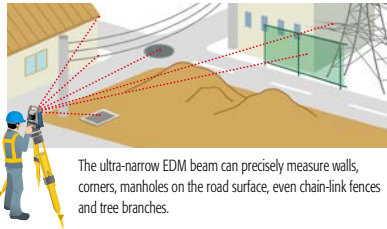

### Japan Quality Products



We perform the tough environmental tests to ensure long-term operation even under the rough site environments.

iM Series total stations are thoroughly inspected with dust-proof and water-proof test chambers.

In addition, the various tests against vibration, drop, temperature, and humidity were successfully passed to achieve the best environmental spec. Also, the measuring distance accuracy test on base line and the instrument leveling and angle accuracy test and adjustment by collimator system ensure your satisfaction on iM Series product quality.

### Standard Package Components

- Main unit • Battery (BDC46C)
- Battery charger (CDC68A)
- Power Cable • Lens cap • Lens hood
- Tool pouch • Precision Screwdriver
- Lens brush • Hexagonal wrench x2
- Cleaning cloth • Quick Manual
- Laser caution sign-board
- Carrying case • Carrying strap

Model		iM-52	iM-55
Telescope		30x / 2.5"	
Magnification / Resolving power		Length : 171mm (6.7in.), Objective aperture : 45mm (1.8in.) (48mm (1.9in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.) Reticle illumination: 5 brightness levels	
Others			
Angle measurement			
Minimum Display (selectable)		1"/5" (0.0002 / 0.001gon, 0.005 / 0.02mil)	
Accuracy (ISO 17123-3:2001)		2"	
Dual-axis compensator		Dual-axis liquid tilt sensor, working range: ±6'	
Collimation compensation		On/Off (selectable)	
Distance measurement			
Laser output <sup>*1</sup>		Reflectorless mode : Class 3R / Prism/sheet mode : Class 1	
Measuring range (under average conditions <sup>*2</sup> )	Reflectorless <sup>*3</sup>	0.3 to 500m (1,640ft.)	
	Reflective sheet <sup>*4*5</sup>	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.), RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.)	
	Mini prisms	CP01: 1.3 to 2,500m (4.3 to 8,200ft.), OR1PA: 1.3 to 500m (4.3 to 1,640ft.)	
	One prism	1.3 to 4,000m (4.3 to 13,120ft.)	
	Minimum Display	Fine / Rapid : 0.0001m (0.001ft. / 1/16 in.) / 0.001m (0.005ft. / 1/8 in.) (selectable) Tracking / Road : 0.001m (0.005ft. / 1/8 in.) / 0.01m (0.02ft. / 1/2 in.) (selectable)	
Accuracy <sup>*2</sup> (ISO 17123-4:2001) (D=measuring distance in mm)	Reflectorless <sup>*3</sup>	(2 + 2ppm x D) mm <sup>*6</sup>	
	Reflective sheet <sup>*4*5</sup>	(2 + 2ppm x D) mm	
	Prism <sup>*7</sup>	(1.5 + 2ppm x D) mm	
Measuring time <sup>*8</sup>	Fine	0.9s (initial 1.5s)	
	Rapid	0.6s (initial 1.3s)	
	Tracking	0.4s (initial 1.3s)	
OS, Interface and Data management			
Operating system		Linux	
Display / Keyboard		Graphic LCD, 192 x 80 dots, backlight : on/off (Selectable) / Alphanumeric keyboard / 28 keys with backlight	
Control panel location		On both faces	On single face
Data storage	Internal memory	Approx. 50,000 points	
	Plug-in memory device	USB flash memory (max. 32GB)	
Interface		Serial RS-232C, USB2.0 (Type A for USB flash memory)	
	Bluetooth modem (option) <sup>*9</sup>	Bluetooth Class 1.5, Operating range: up to 10m <sup>*10</sup>	
General			
Laser-pointer		Coaxial red laser using EDM beam	
Levels	Graphic	6' (Inner Circle)	
	Circular level (on tribrach)	10' / 2mm	
Plummet	Optical	Magnification: 3x, Minimum focus: 0.5m (19.7in.) from tribrach bottom Red laser diode (635nm±10nm), Beam accuracy: ≤1.0mm@1.3m, Class 2 laser product	
	Laser (option)		
Dust and water protection / Operating temperature		IP66 (IEC 60529:2001) / -20 to +60°C (-4 to +140°F)	
Size with handle		183(W)x 181(D)x 348(H)mm (On both faces)	183(W)x 174(D)x 348(H)mm (On single face)
Instrument height		192.5mm from tribrach mounting surface	
Weight with battery & tribrach		Approx. 5.1kg (11.3lb)	
Power supply			
Battery		Li-ion rechargeable battery BDC46C	
Operating time (20°C) <sup>*11</sup>		Approx. 14hours <sup>*12</sup>	
Application program			
On board		<ul style="list-style-type: none"> <li>• REM Measurement • 3D Coordinate Measurement</li> <li>• Resection • Stake Out • Topography Observation</li> <li>• Offset Measurement • Missing Line Measurement • Intersection</li> <li>• Surface Area Calculation • Route Surveying • Point to Line</li> </ul>	

\*1 IEC60825-1:Ed.3.0:2014/ FDA CDRH 21 CFR Part 1040.10 and 11 \*2 Average conditions: Slight haze, visibility about 20km (12 miles), sunny periods, weak scintillation. \*3 With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. \*4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target. \*5 Measuring range in temperatures of 50 to 60°C (122 to 140°F): RS90N-K: 1.3 to 300m (4.3 to 980ft.), RS50N-K: 1.3 to 180m (4.3 to 590ft.), RS10N-K: 1.3 to 60m (4.3 to 190ft.) \*6 Measuring range: 0.3 to 200m \*7 Face the prism toward the instrument during the measurement with the distance at 10 m or less. \*8 Good conditions: No haze, visibility about 40km (25miles), overcast, no scintillation. \*9 Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance. \*10 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity of the instrument, no rain. \*11 Figures will change depending on the operating environment including temperatures and observation conditions. \*12 In use of ECO mode. Fine single measurement every 30sec.

**TOPCON**

**PARAGON  
INSTRUMENTATION  
ENGINEERS PVT. LTD.**

# C-49, Basement, Sector -10, Noida-201301 (UP) India

Mob: - +91 9312403335, Tel: - 0120 – 4263386

Email: [delsales@paragoninstruments.com](mailto:delsales@paragoninstruments.com)

H.O.: 9760091791, 9760091793

[www.paragoninstruments.com](http://www.paragoninstruments.com)

- Specifications may vary by region and are subject to change without notice.

- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.

- Other trademarks and trade names are those of their respective owners.